


Quick Setup Guide

Nano PoE - AT-5ME-A | AT-5TME-A

POWER

Apply **PoE or PoE+** power to this unit over the attached Ethernet cable.

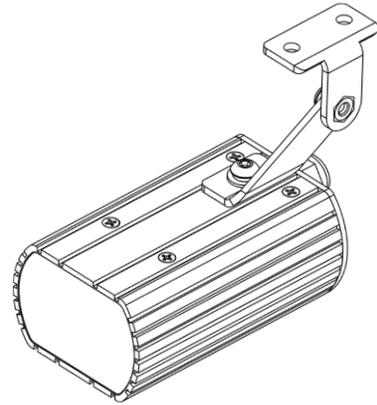

No wiring required simply plug-in Ethernet cable.

AXTON Illuminators have been designed and tested to run 24/7 continuously both indoors and outdoors.

Illuminator will trigger ON/OFF using the built in ambient light sensor which has been pre-set to a threshold of 5-15 lux. ON will trigger immediately while OFF will trigger after a 12-18 second delay.



WARNING! Infrared light is not visible. Do not view directly with optical instruments (magnifiers) or stare directly into the illuminator at close distance

Do not attempt to open or modify the light as this will void the warranty.
*If you need a modification, electric or physical, contact us directly. We will let you know if it can be done. All changes **MUST** be made at our factory.*

QUESTIONS ? **(801) 519-0500** or support@axtontech.com | www.axtontech.com