

# Panoramic IR 360

Wide Angle 850nm Infrared



## Panoramic 360 IR Illuminator

The Panoramic 360° is designed to be mounted onto a pole or column for full 360° infrared coverage. The fully adjustable Pan/Tilt Mounting System adds additional illumination control and flexibility. The mounting frame includes an integrated junction box to simplify installation.


## Easy Integration & Control

Seamless and precise control via Input/Output ports. Sync with camera, sensors or other system devices with I/O ports. For easy integration, a built-in photocell switches the IR ON/OFF based on lighting conditions.

## FEATURES

- 850nm Infrared
- I/O Port Sync with Sensors, Devices
- Automatic Day/Night Sensor
- PoE++ Option: 75 Watt
- Designed and Manufactured in the USA
- Lifetime Warranty


## RANGE

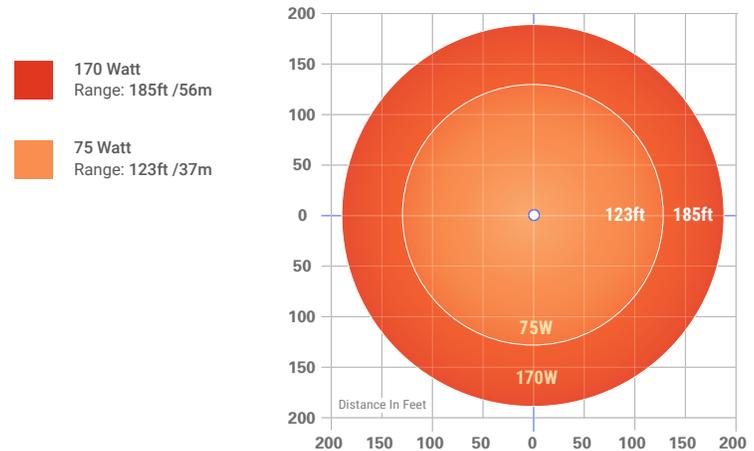

## SPECIFICATIONS

Wavelength	850nm Infrared
Input Voltage Options	24 to 36VDC or Universal AC (75W Only) PoE++ 802.3bt
Power Consumption	Options: 75W or 170 Watt
Operating Temp.	-58° to 140°F / -50° to 60°C
Dimensions	23.78" x 7.3" x 15.2" varies
Weight	15 - 28 lbs / varies by model
Environmental	Outdoor IP67 Rated
Mounting	Pan/Tilt Mounting System*

\*Square or Round Pole Mount Required (depending upon mounting location)

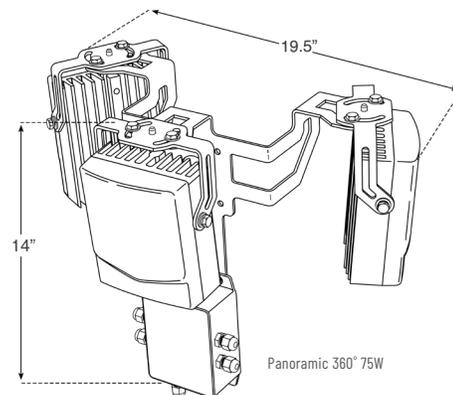

Panoramic 360° 75W