

# ZOOM AT-15Z-S

## Multiple Coverage Angle IR



### Features

- 850nm IR Illuminator
- Multiple IR Coverage Angles
- Angles: 90°, 60°x30° & 20°x10°
- Outdoor IP67 Rated
- Up to 400ft of IR Illumination (20°x10°)
- I/O Ports for Seamless Sync
- Automatic Day/Night Switch
- Lifetime Warranty

### Specifications

Wavelength	850nm Infrared
Input Voltage	24-36VDC or 24VAC
Power Consumption	15 Watts
Multiple Angles	90°, 60°x30° & 20°x10°
Operating Temperature	-58° to 140°F / -50° to 60°C
Dimensions	5.25" x 3" x 7.25" / 133 x 76 x 184mm
Weight	3 lbs / 1.3kg
Environmental	IP67 Outdoor Rated
Mounting	Pan/Tilt U Bracket Included

### Flexible Infrared Coverage

The Zoom AT-15Z has multiple built-in angle options for wide, medium or narrow IR coverage. Angle selection can be done at the time of installation, or in real-time via the I/O ports. No need to physically alter the lights.


### Input Output (I/O) Ports & Day/Night Switch

Seamless and precise integration via I/O ports. Sync with camera or any other system device with I/O capability. Automatic ON/OFF via built-in photocell.

### Lifetime Warranty - Made In The USA

Covered by a lifetime warranty with advanced replacement. All Axton lights are designed and manufactured in the USA.


### Illumination Range

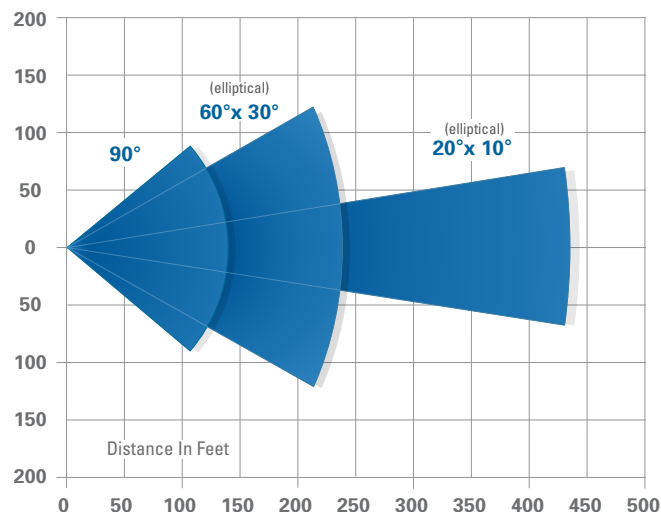

Angle: 90°  
Range: 145ft / 44m  
HFOV : 205ft / 62m

Angle: 60°x30°  
Range: 230ft / 70m  
HFOV : 230ft / 70m

Angle: 20°x10°  
Range: 430ft / 131m  
HFOV : 150ft / 45m

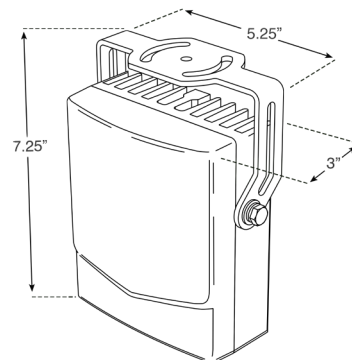

801 Robinson Drive, Suite 500, North Salt Lake, UT 84054  
 ☎ 801/519-0500 📠 801/519-0501 ✉ sales@axtontech.com 🌐 axtontech.com

